


Mechanical time switches

Mechanical time switch with trippers for domestic use.

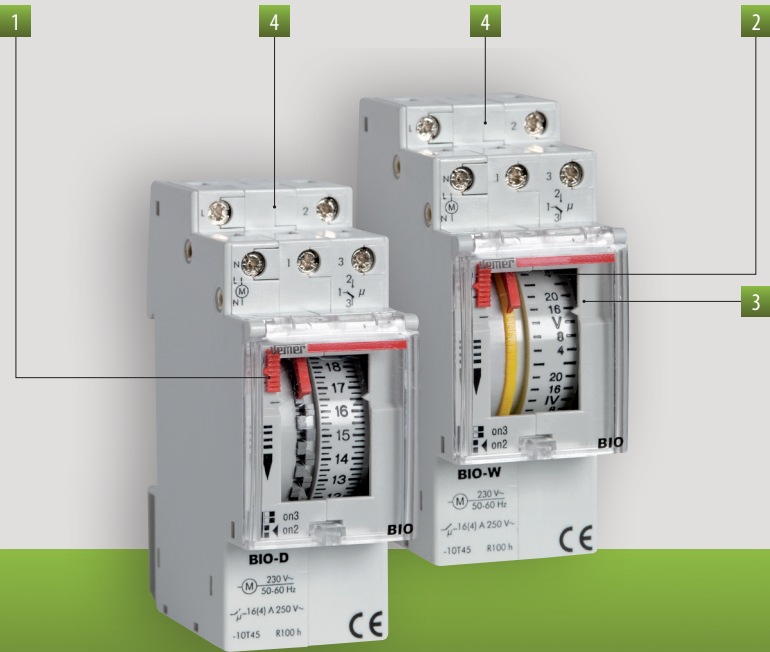


- 1 Manual selector
- 2 Quadrant
- 3 Time index
- 4 Container: 2 DIN modules


BIO

DIMENSIONS (mm)

Front view

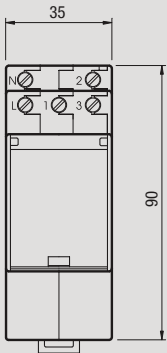


Side view

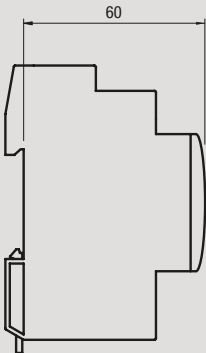

CONNECTION DIAGRAM

Diagram



TIME MANAGEMENT

DAILY / WEEKLY TIME SWITCHES

- Daily, weekly programming
- Power supply 230 V 45/60 Hz
- Fastening on DIN rail



TECHNICAL INFORMATION

GENERAL CHARACTERISTICS

Power supply	V AC	230 (- 15% ÷ +10%)
Frequency	Hz	50 / 60
Absorption	W	0.5
Output		Relay with change-over contact 16 (4) A / 250 V AC
Mechanism		Stepping motor with quartz crystal oscillator

Charge reserve	100 h after charging uninterrupted of 48 h
Operating Precision	± 1 second a day at 22°C
Operating temperature	°C -10 ÷ +50
Insulation	Class II
Degree of protection	IP 20

	BIO-D	BIO-W
Quadrant	1 of 24 hours	1 of 7 days
No of trippers	96	84
Minimum intervention time	15 min	2 hours

REFERENCE STANDARDS

Compliance with Community Directives: 2006/95/EC (Low Voltage) and 2004/108/EC (E.M.C.) is declared with reference to the following Harmonized Standards: • Safety: EN 60669-2-3 • E.M. Compatibility: EN 61000-6-1 / EN 61000-6-3

Code	Model	Description	Quadrant	N° trippers
VE087300	BIO-D	Daily mechanical time switch	24 h	96
VE088100	BIO-W	Weekly mechanical time switch	7 days	84

Energy Conservation Solutions Pty Ltd
Exclusive Distributor for VEMER in Australia
Locations: VIC/TAS, NSW, QLD, ACT, SA/NT & WA
Phone: **1300 306 136**
For contact details visit: www.ecs.net.au