



QuickSet Remote

LightSpot HD IR Programmer




Operating Instructions

General use

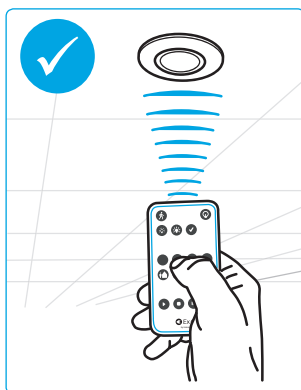
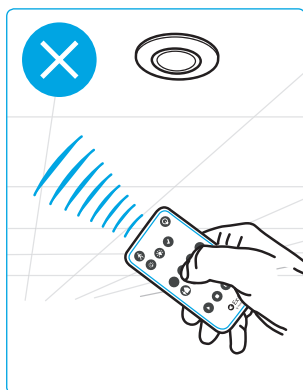


Start up

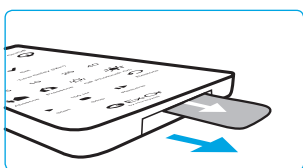

 The used battery must be disposed of in accordance with the applicable regulations.

Battery Replacement

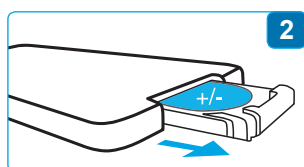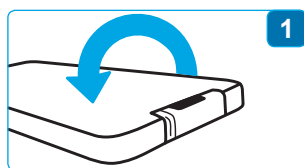

Transmission Method: Infrared

Range: 15m approx

Battery: 3V DC CR2032 Lithium Button Cell
Expected Battery life: 3 years

Storage Temperature: -25oC to 70oC


Operating Temperature: 0oC to 40oC

IP Rating: 4X

Approval: CE

Dimensions: 100mm (h) x 50mm (w) x 7mm (d)

Weight: 45g approx

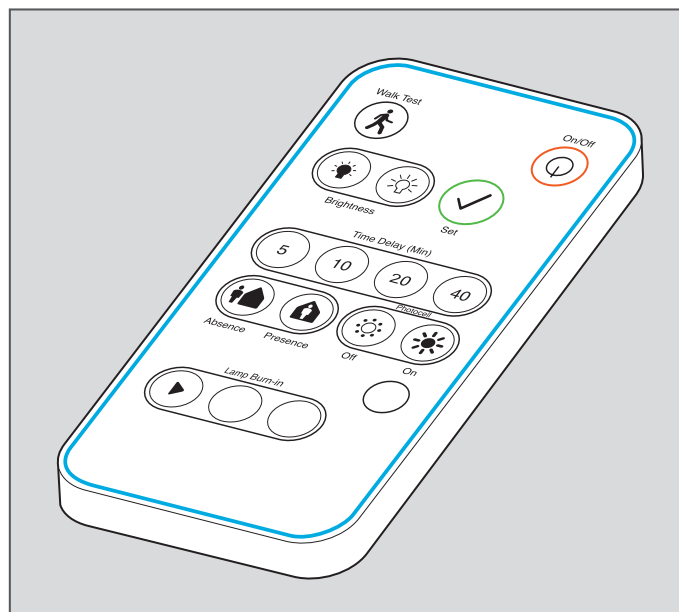

Functions

Walk Test		Sets time delay to 10 seconds to check detector operation
On/Off		Turn lights on/off
Brightness		Dim lighting
		Increase lighting
Set		Set light level thresholds for photocell
Time Delay		5 minute time delay
		10 minute time delay
		20 minute time delay
		40 minute time delay
Absence		Absence mode
Presence		Presence mode
Photocell		Photocell on
		Photocell off
Restore		Factory defaults. Hold button until sensor acknowledges with red, green, blue sequence (approx. 5 seconds)
Lamp Burn-in		Start
		Stop
		Resume